AUSTRALIAN
BULK HANDLING REVIEW
www.BulkHandling.com.au
Volume 18 No 6 Nov/Dec 2013

- Changing of the guard at Kockums
- ABHR in conversation with Veyance top brass
- Two peer reviewed papers
- All the winners from the 2013 Australian Bulk Handling Awards
- Dust control feature

TRANSMiN

A Revolution in Feeder Technology.. pg 34

US mixer for Japanese powder maker

A Japanese metal powder manufacturer explains how a US-made Munson rotary batch mixer is crucial to its operation.

Batches of metal powder typically weighing 4000-5000kg are loaded into the Munson rotary batch mixer from an overhead container that is moved into position by a crane.

As the rotary batch mixer discharges, particle size distribution remains unchanged, which was not the case with other mixers used by Nippon Atomized Metal Powders.

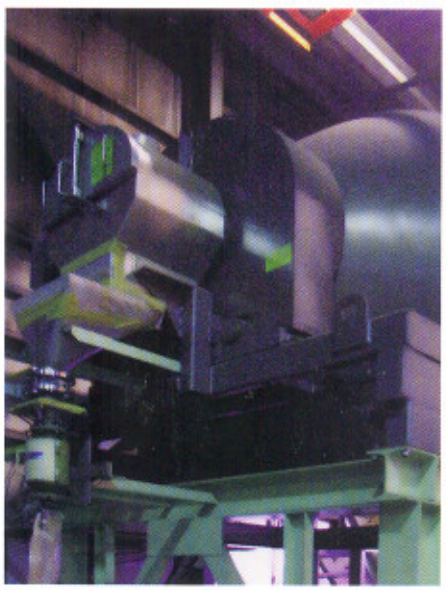

The 2.5m³ capacity rotary batch mixer evacuates fully, eliminating wasted material and allowing rapid, thorough cleaning between changeovers.

Nippon Atomized Metal Powders is a supplier of super-fine metal powders for use in assemblies, bearings, cutting and polishing tools, jewelry, and metal injection moulding.

Based in Noda, Japan, the company takes copper, bronze, brass, silver, gold and stainless steel, and applies a patented water atomisation process, then dries, screens and blends the products, to compose powders with well-shaped, uniform particles between 1.5 and 500 microns.

A key factor in the blending process, according to research and development general manager, Koji Yamamoto, is Nippon Atomized Metal Powders' rotary batch mixer, made by US manufacturer, Munson Machinery.

The 2.5m³ capacity rotary batch mixer meets Yamamoto's requirements to blend large batches with short cycle times and complete discharge, he says. It is also effective, Yamamoto adds, at avoiding particle size segregation on discharge.

Making metal powders in a long tradition

Nippon Atomized Metal Powders was established in 1964 in the city of Noda, which is around 40km north of Tokyo and known as the home of Kikkoman soy sauce. In 1980 the firm moved to a new site in Noda, and in 2012 it built a new site in a neighbouring prefecture to make super-fine metal powders by the water jet atomisation process.

Today the company employs around 100 people and has an annual output of about 2640 tonnes, of which one-third is exported.

Powdered metal products produced by Nippon Atomized Metal Powders include:

- Copper, silver and gold powders for conductive pastes used in electronics
- Bronze powders for bonding industrial diamonds in tools which cut silicon wafers and stone, and polish glass
- Bronze and brass powders for bearings in electric motors and car parts
- Silver and gold powders for metal clay, a craft material developed in Japan
- Soft magnetic alloy powders for inductors used in electronic power supplies
- Small amounts of stainless steel powders for metal injection moulding (MIM)

Water jet atomisation explained

Processes for making metal powders include atomisation with gas or water jets, centrifugal sprays, mechanical milling, and electrolysis.

Water jet atomisation technology was invented by a Japanese research institution and licenced and improved upon by Nippon Atomized Metal Powders, Yamamoto says.

In the water atomisation method, he explains, water pumped at high pressure through a ring-shaped nozzle creates a convergent conical jet. Molten metal fed into the centre of the cone is blasted into fine droplets, which solidify into powder as they fall into a tank of water beneath the nozzle.

According to Yamamoto, water jet atomisation is economical and flexible, compared to other methods. He says it allows tight control over density, particle shape and diameter – from microns to millimetres – and works with many different metals and alloys.

A drawback of the original water atomisation process is that the particles can have poor shape and fineness compared to those made by gas atomisation.

But Yamamoto says the company developed an improved process running at higher pressures, which produces super-fine powders with spherical particles down to 1.5 microns.

A number of process variables must be controlled to achieve good results.

For the water jet, critical variables are the aspect angle, water pressure, and flow rate. The temperatures of the molten metal, the water, and the surrounding atmosphere are also important. Finally, downstream operations such as drying and

The Nippon Atomized Metal Powders plant.

blending of the powders must be done correctly to maintain powder quality.

Melting, atomising, drying, and blending turn scrap into valuable products

Raw materials enter the site in various forms, many of them recycled. The copper, for instance, is a mixture of electrolytically refined virgin metal and scrap from electric cables and the electronics manufacturing industry. Stainless steel arrives as scrap. Other raw materials include high-purity tin, gold, and silver.

The metals are melted in an induction furnace. As the melt forms, the furnace operator uses a spectrograph to adjust and control the resulting alloy compositions within close limits.

Downstream of the furnace is the water atomisation machine, followed by equipment to dewater and dry the metal powder. Powders pass through a gyratory box screener to control particle size. For the finest powders, ultrasonic sieving and an air classifier carry out the same task. Finally, the powders are homogenised and blended, sieved again, and packed into drums for shipping.

Material rejected at various points in the process is returned to the appropriate stage: re-sieving, re-mixing, atomisation, re-melting. A small fraction ends up as waste that is sold to mining companies or scrap merchants.

Rotary batch mixer

The Munson rotary batch mixer plays a key role in producing metal powders having particle sizes from 10 micron up to 500 micron (30 mesh) and specific gravities in the range 1.8–3.5. The mixer's volume is 2.5 cu m, and typical batch sizes are 4000-5000kg.

"We use the mixer mainly as a homogeniser to avoid material segregation," says Yamamoto. "We need to be sure that particle size distribution is the same across the batch, and from one batch to the next. With the Munson, we get good blending and complete discharge without segregation, and short mixing time, even with the large capacity."

INVICTA
Driving the vibration industry for over 50 years

ELECTRIC • HYDRAULIC • PNEUMATIC • CONTROLS
Proudly distributed by Teco Australia since 1987
TECO 30 years in Australia
Sydney (02) 9765 8118 | Melbourne (03) 9720 4411 | Brisbane (07) 3373 9600 | Perth (08) 9479 4879
Email: emd@teco.com.au www.teco.com.au

Copper-tin pre-alloyed bronze powder for diamond cutting is the finest (20-30 micron) homogenized in the rotary batch mixer.



Pure copper powder, the coarsest powder processed in the rotary batch mixer, ranges from 85-100 microns.

Nippon Atomized Metal Powders' main product for oil-less bearings is partially premixed copper-tin bronze powder.

A sample of the products made with the company's powders.

Nippon Atomized purchased the mixer to increase capacity. "Our previous double-cone blender was limited to 1500 kg per charge," Yamamoto says, "and a batch took 20 minutes to blend. This was too small and too slow for our production needs. The rotary batch mixer blends up to 5000kg in just 5 to 7 minutes."

The unit's four-way mixing action – tumble, turn, cut and fold – achieves batch uniformity rapidly, and more gently than with agitated blenders. Continuous rotation keeps material in motion at all times, preventing particle-size segregation during discharge.

Why the company imported its mixer

Yamamoto says Nippon Atomized Metal Powders imported a mixer because, "We wanted complete discharge without segregation, plus large capacity. There are no Japanese mixers that combine these important features."

The Japanese powder metallurgy industry mostly uses V-blenders and double-cone blenders, Yamamoto explains. These mixer types provide complete discharge, but on discharge there tends to be segregation of particle sizes: "In general, the particle size distribution moves from fine to coarse as the mixer is discharged. The Munson mixer avoids this problem.

"We learned about the mixer from an article in a powder metal trade publication showing how GKN Sinter Metals Inc. had successfully used it for metal powders.

"I do know a domestic machinery producer which makes a similar rotary batch mixer. However, this mixer has a complex construction and I guessed it would to be hard to use. It was also comparatively expensive."

Overcoming challenges proved worthwhile

Headroom is tight, says Yamamoto, and it was a challenge to fit everything into the available space, as the mixer is loaded from an overhead container that is moved into position by a crane.

Customer acceptance was also an issue, he says, and even now some customers are reluctant to change to the offshore mixer for their products.

But any initial headaches were well worthwhile, Yamamoto says, with the mixer proving both effective and reliable after nearly three years in operation.

When a change of grade is required, cleaning is straightforward; a small quantity of the new product is used to clean the mixer and is then recycled.

"And we don't have to worry about maintenance," Yamamoto says. "With our previous mixer, the design of the machine caused a lot of trouble with the axle and the drive chain. As long as the drum alignment is okay, the rotary batch mixer is trouble-free, and the quality of blending means lower costs for quality control." ■

Contact: Email - tony@ibulk.com.au Web - www.iBulk.com.au

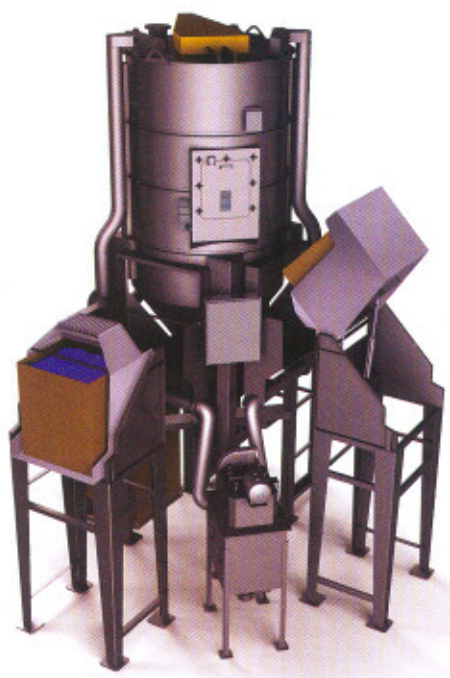

NBE's mixer can blend 11.5 tonnes of homogenous material each hour, in a fully-automated process.

NBE mixer blends 11.5t/hr

National Bulk Equipment (NBE) has announced a high-volume mixing system capable of blending 11,500kg per hour of semi-free-flowing material into an accurate, homogenous blend.

NBE's mixer is fully integrated with twin, high-speed, 1,150kg capacity box dumpers and a pair of 20.32cm diameter discharge spouts.

Within the mixer, a 35.56-centimeter diameter auger mixes semi free-flowing material in a 38.10-centimeter diameter, 10-gauge mix tube.

In-feed scoop blades at the base of the mixing auger, and broad-throw dispersion paddles at the top of the